



The best-selling CSP 555 heavy duty water-cooled capacitor offers up to 800 kVAr.

Specifications


Type		CSP 555								
Dimensions (L x W x H)	mm	160 x 120 x 30.5								
Weight	kg	3								
Capacitance ($\pm 10\%$)	μ F	0.4 μ F	0.8 μ F	1.4 μ F	2.7 μ F	4 μ F	5.3 μ F	11 μ F	19 μ F	
Sinusoidal Voltage	V _{rms}	700			600		500	400		
Peak Voltage	V	990			850		710	570		
Max. Current	A _{rms}	1200	1500							
Max. Power	kVA _r	800						750	600	
Freq Range @ Full Power	kHz	650-700	325-560	186-320	96-166	88-112	67-84	43-43	31-31	
Stray Inductance	nH	<5								

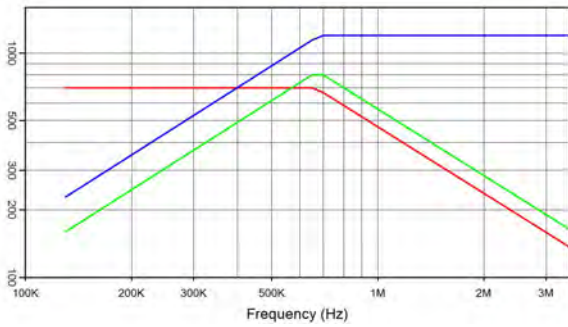


CSP 555 0.4 μF 700 V_{rms} 1200 A_{rms} 800 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —

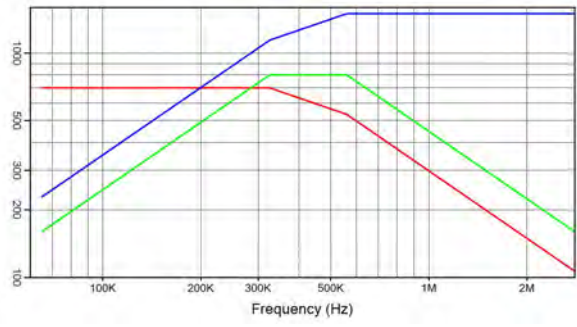


CSP 555 0.8 μF 700 V_{rms} 1500 A_{rms} 800 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —

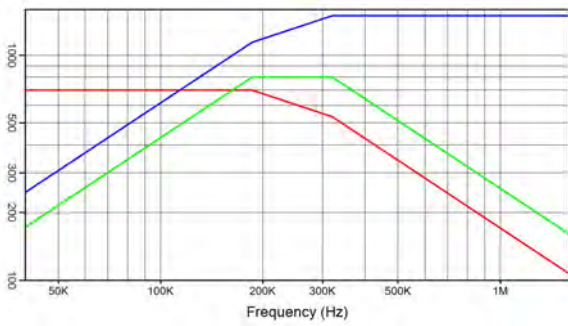


CSP 555 1.4 μF 700 V_{rms} 1500 A_{rms} 800 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —

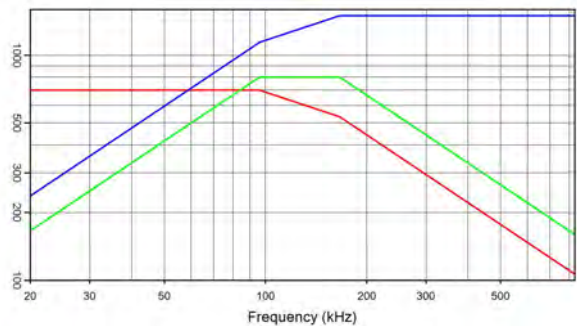


CSP 555 2.7 μF 700 V_{rms} 1500 A_{rms} 800 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —

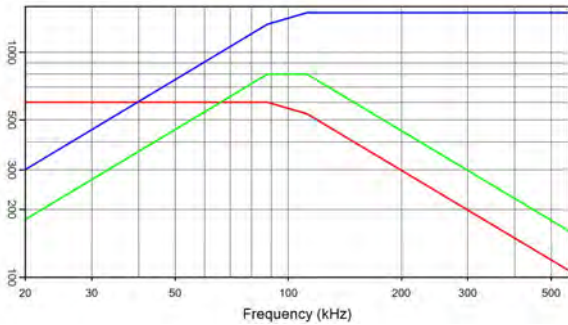


CSP 555 4 μF 600 V_{rms} 1500 A_{rms} 800 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —

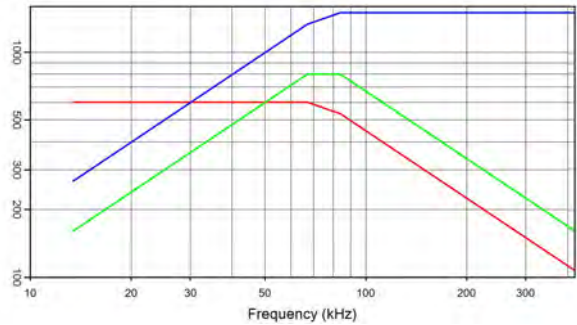

CSP 555 5.3 μF 600 V_{rms} 1500 A_{rms} 800 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —

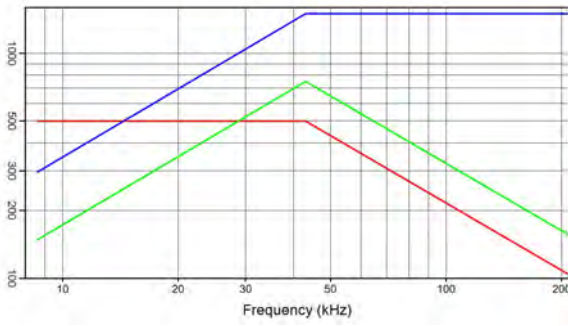

CSP 555 11 μF 500 V_{rms} 1500 A_{rms} 750 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —

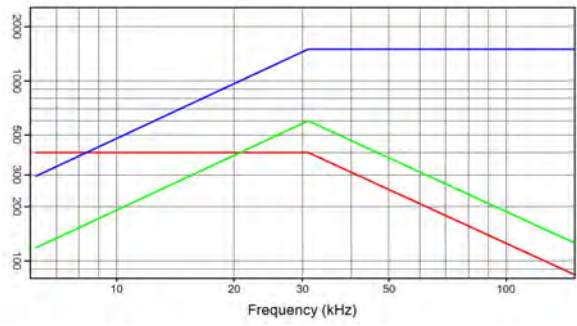

CSP 555 19 μF 400 V_{rms} 1500 A_{rms} 600 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —